


# Legend

- Garden Place
- Meridian Windfarm
- Zone Substations
- ▲ Proposed Substations
- GXP
- WEL Boundary
- Urban Footprint

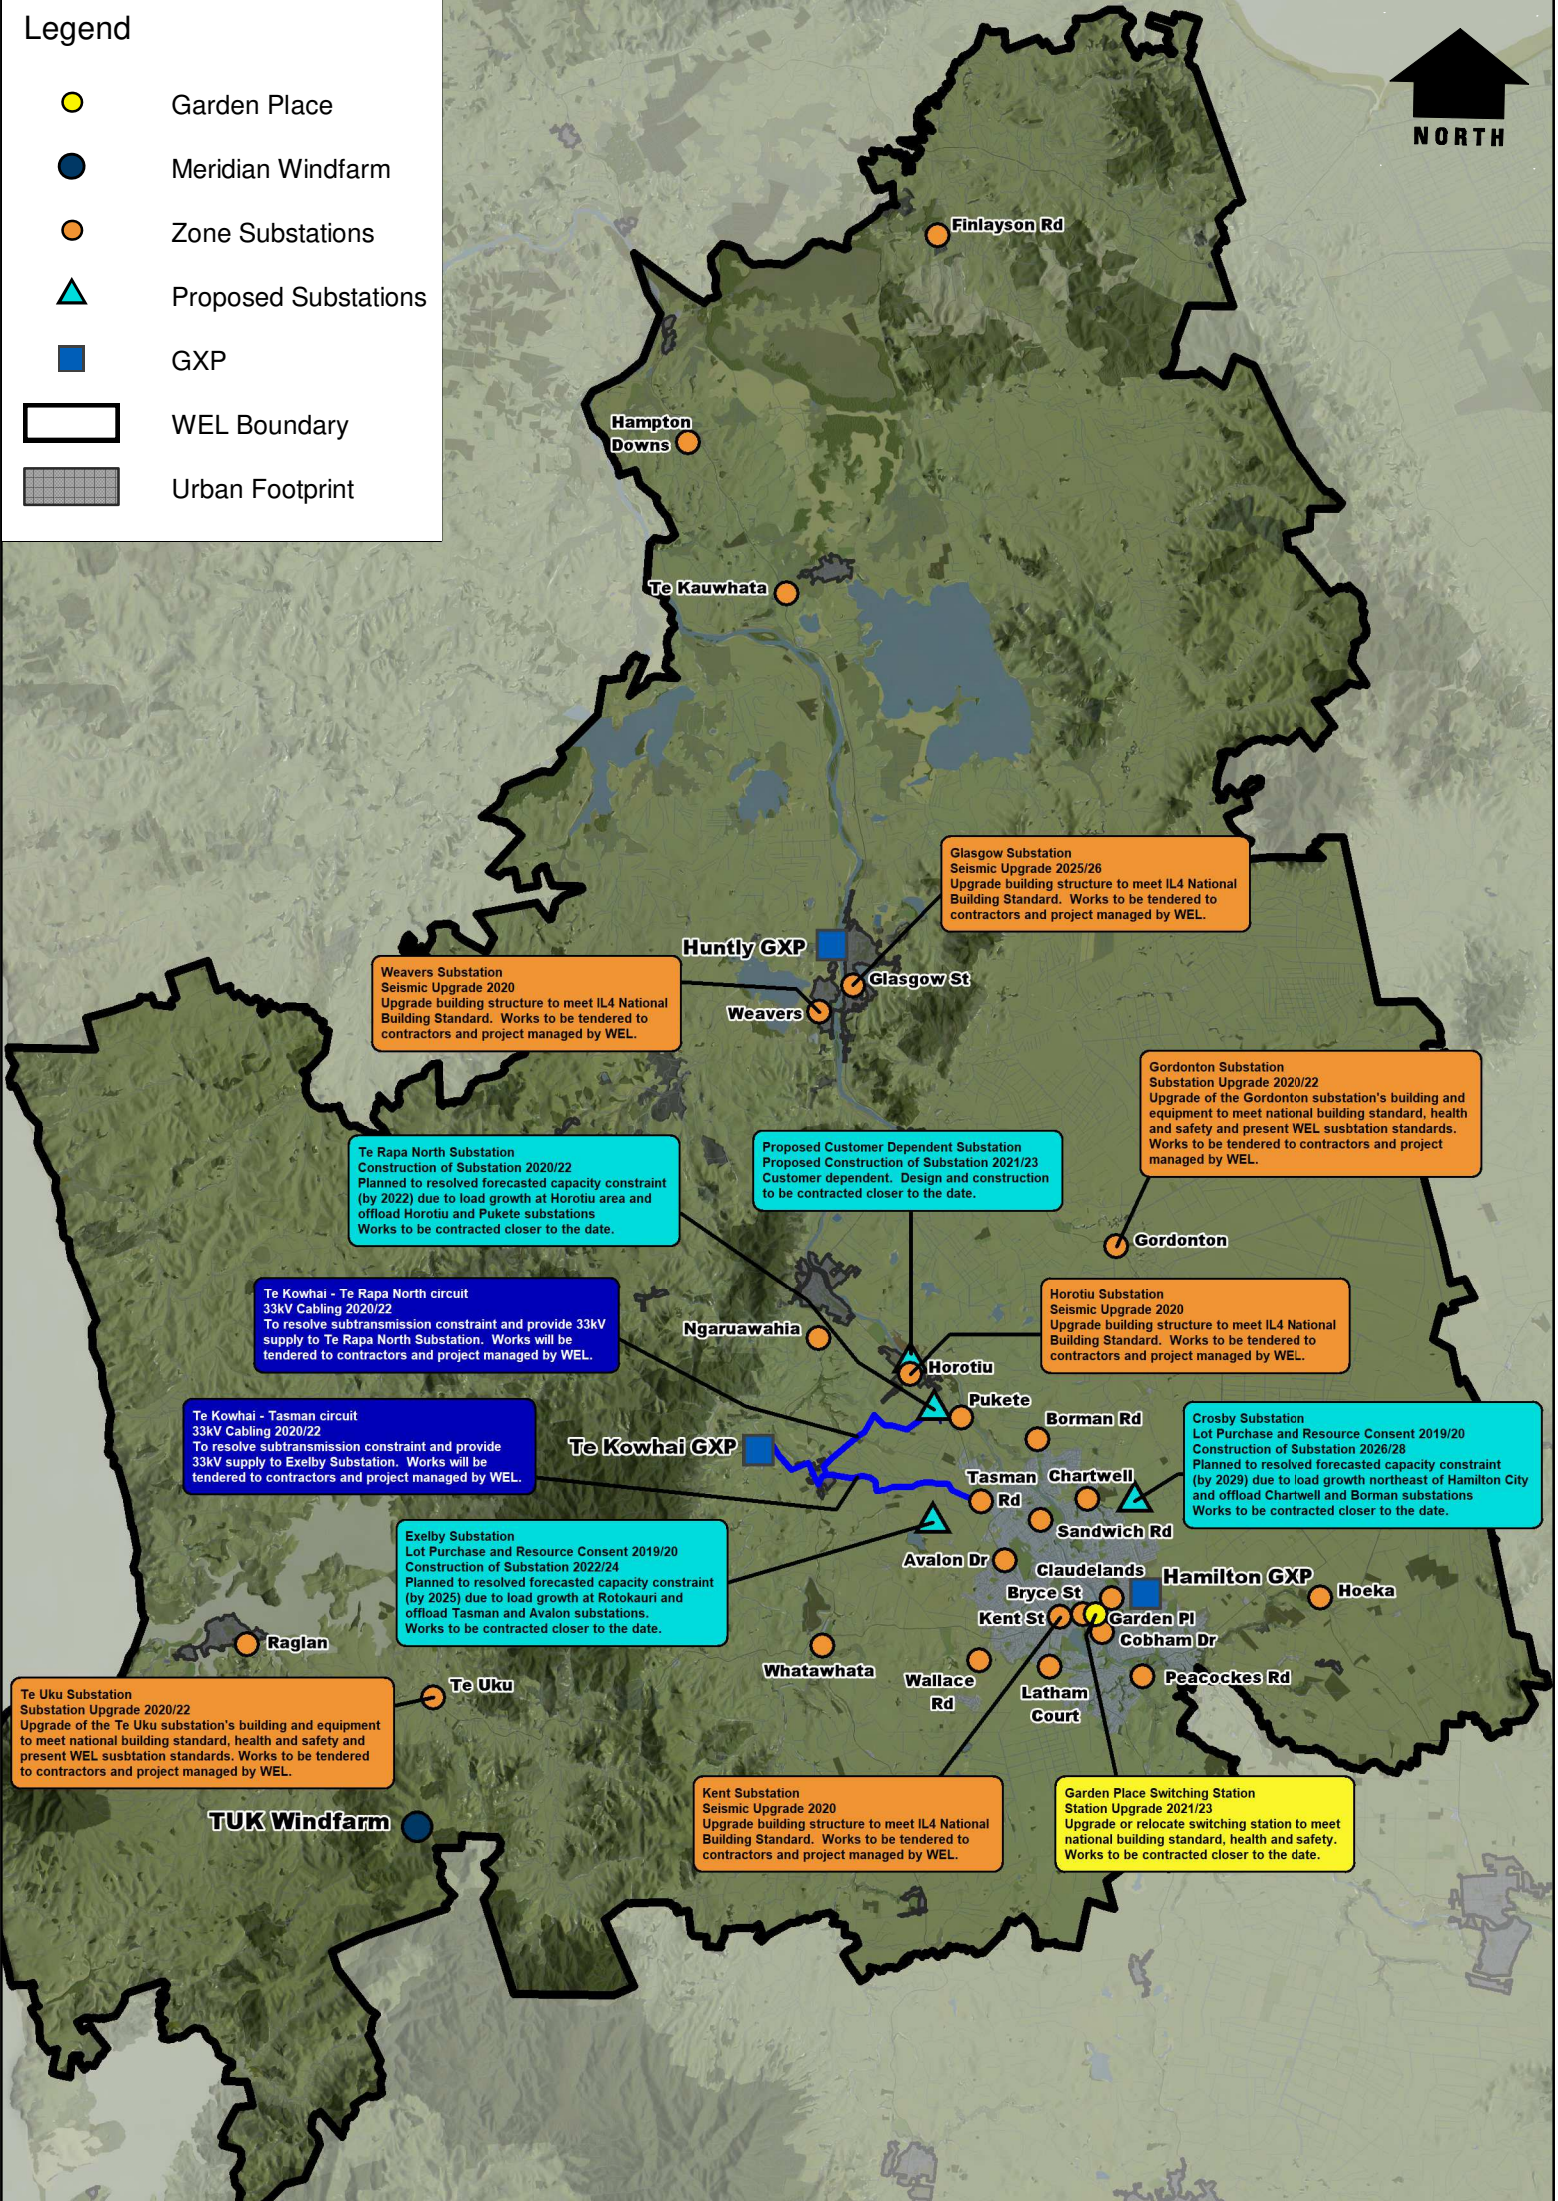

**Weavers Substation**  
Seismic Upgrade 2020  
Upgrade building structure to meet IL4 National Building Standard. Works to be tendered to contractors and project managed by WEL.

**Glasgow Substation**  
Seismic Upgrade 2025/26  
Upgrade building structure to meet IL4 National Building Standard. Works to be tendered to contractors and project managed by WEL.

**Te Rapa North Substation**  
Construction of Substation 2020/22  
Planned to resolve forecasted capacity constraint (by 2022) due to load growth at Horotiu area and offload Horotiu and Pukete substations  
Works to be contracted closer to the date.

**Proposed Customer Dependent Substation**  
Proposed Construction of Substation 2021/23  
Customer dependent. Design and construction to be contracted closer to the date.

**Gordonton Substation**  
Substation Upgrade 2020/22  
Upgrade of the Gordonton substation's building and equipment to meet national building standard, health and safety and present WEL substation standards. Works to be tendered to contractors and project managed by WEL.

**Te Kowhai - Te Rapa North circuit**  
33kV Cabling 2020/22  
To resolve subtransmission constraint and provide 33kV supply to Te Rapa North Substation. Works will be tendered to contractors and project managed by WEL.

**Horotiu Substation**  
Seismic Upgrade 2020  
Upgrade building structure to meet IL4 National Building Standard. Works to be tendered to contractors and project managed by WEL.

**Te Kowhai - Tasman circuit**  
33kV Cabling 2020/22  
To resolve subtransmission constraint and provide 33kV supply to Exelby Substation. Works will be tendered to contractors and project managed by WEL.

**Crosby Substation**  
Lot Purchase and Resource Consent 2019/20  
Construction of Substation 2026/28  
Planned to resolve forecasted capacity constraint (by 2029) due to load growth northeast of Hamilton City and offload Chartwell and Borman substations  
Works to be contracted closer to the date.

**Exelby Substation**  
Lot Purchase and Resource Consent 2019/20  
Construction of Substation 2022/24  
Planned to resolve forecasted capacity constraint (by 2025) due to load growth at Rotokauri and offload Tasman and Avalon substations.  
Works to be contracted closer to the date.

**Te Uku Substation**  
Substation Upgrade 2020/22  
Upgrade of the Te Uku substation's building and equipment to meet national building standard, health and safety and present WEL substation standards. Works to be tendered to contractors and project managed by WEL.

**Kent Substation**  
Seismic Upgrade 2020  
Upgrade building structure to meet IL4 National Building Standard. Works to be tendered to contractors and project managed by WEL.

**Garden Place Switching Station**  
Station Upgrade 2021/23  
Upgrade or relocate switching station to meet national building standard, health and safety. Works to be contracted closer to the date.

**TUK Windfarm**